

Fresh

Wall vent TL98F

Cat. Part Number 629865

- Variable airflow-adjustment
- Condensation protected
- Distribution pattern for floor-heating
- Built-in minimum-flow
- Several filter-alternatives



A flexible air vent for wall mounting designed to provide a continuous airflow into the house.


Functions

Condensation protection, Filter

Tecnical data

Installation type, wall, ceiling et.c	Exterior wall
Duct size nominal Ø (mm)	100
Duct Length	360
Unpackaged Product Width (mm)	156
Unpackaged Product Height (mm)	168
Unpackaged Product Depth (mm)	432
Material	Plastic
Plastic Material detail	ABS, PP
Etim Code	EC011497

Measure sketch/CAD

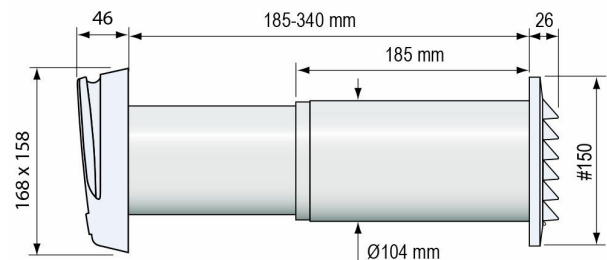

Description

Description/function

TL-F is a wall vent with a very comfortable distribution pattern, mainly designed for floor-heating. The internal part is delivered with a replaceable dust & insect filter. The airflow is adjusted by a regulator which is hidden underneath the front cover. TL-F is available in several different soundreducing models.

Standard

TL-F is a supply air vent for wall mounting. A complete set contain internal part, adapters, wall pipes and external grille. The wall pipes are available in different lengths and fit telescopically which gives a flexible joint. The internal vent and external grille fit onto the adapters with snap-in closure.

Internal part

The internal part has a condensationprotected design, filter and a variable


precision damper for infinitely adjustment of the airflow. The regulator is hidden underneath the front cover.

The distribution pattern is especially developed to suit floor heating, the vent distributes the air both upwards and sideways. The incoming air is efficiently mixed with the convection flow. Cold incoming air reaches a comfortable temperature even only a decimetre from the vent.

Mounting

A high placing on the wall is recommended. The vent can with advantage be used in rooms with floor heating as it has been designed mainly for this solution. If there is a radiator in the room the vent should be placed above it. With this solution the convection flow is used and maximum comfort is achieved.

Kapacitet

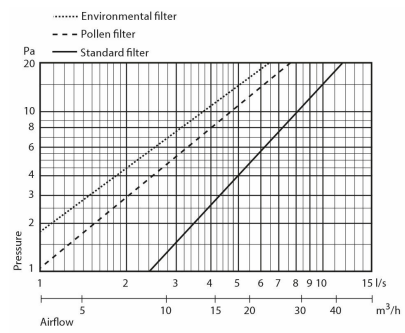

Accessories



**Flimmerfilter
D94**

Cat 423778



**Filter TL-F/P
pollen 3-pcs**

Cat 183294



**Filter TL-F/P
and D-800/D-
1200 standard
3-pcs**

Cat 183293



**External grille
110x154**

Cat 181756



**External grille
110x154**

Cat 181751



**External grille
#150 white**

Cat 181701



**External grille
#150 brun**

Cat 181703



**External grille
#150 rød**

Cat 181705



**External grille
#150 black**

Cat 181706



**External grille
#150 grey**

Cat 181707



**Insect net 150
DIY**

Cat 664004



**Grille Tyfon
weatherproof
Ø180 white**

Cat 910011



**Grille Tyfon
weatherproof
D180 Grey**

Cat 910012

Cat 661073



Hole saw D108

Cat 804050



Chuck D32-210

Cat 804046



**Chuck
extender D32-
210**

Cat 804048

Cat 661075



Cat 661072



**Wall pipe
100/104x130**

Cat 661080



**Filterholder
TL-F complete**

Cat 193278